

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
27 December 2001 (27.12.2001)


PCT

(10) International Publication Number
WO 01/99431 A2

- (51) International Patent Classification⁷: H04N 9/04, 3/15 (74) Agents: BALES, Jennifer, L. et al.; Macheledt Bales & Johnson LLP, Mountain View Plaza, 1520 Euclid Circle, Lafayette, CO 80026-1250 (US).
- (21) International Application Number: PCT/US01/18954
- (22) International Filing Date: 13 June 2001 (13.06.2001) (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/596,153 16 June 2000 (16.06.2000) US (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: UNIVERSITY TECHNOLOGY CORPORATION [—US]; 3101 Iris Avenue, Suite 250, Boulder, CO 80301 (US).
- (72) Inventors: CATHEY, Wade, Thomas, Jr.; 228 Alpine Way, Boulder, CO 80304 (US). WACH, Hans, Brandon; 1130 6th Avenue, Longmont, CO 80501 (US).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METHODS AND APPARATUS FOR INCREASING RESOLUTION IN DIGITAL IMAGING SYSTEMS BY OFF-SETTING PIXELS

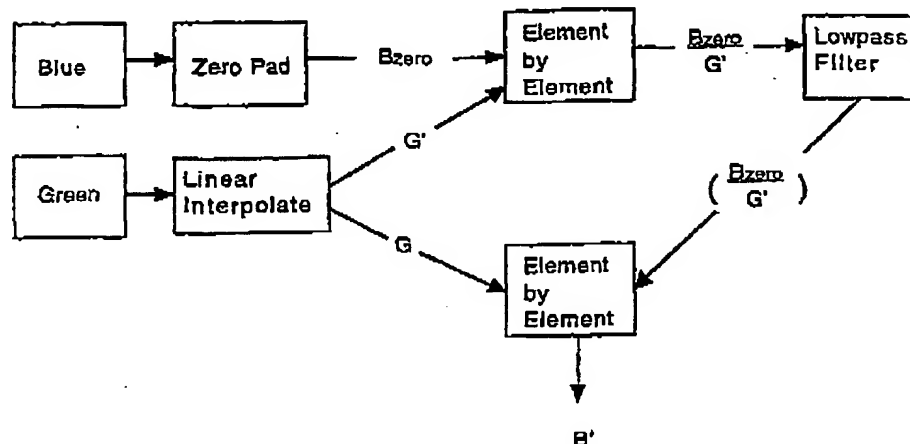

(57) Abstract: Methods and apparatus for increasing resolution in digital imaging systems reposition the fixed detector arrays (or the red, green, and blue images on the detector arrays) so that the resolution of the composite three color image is increased. For example, the green CCD image is shifted horizontally and vertically 1/3 of a pixel with respect to the red CCD image, and the blue CCD image is further shifted horizontally and vertically 1/3 of a pixel with respect to the green CCD image. Image alignment may be accomplished with some combination of CCD movement and/or image movement. The color recovery process, also called reconstruction, may be aided by use of one of several interpolation methods. Color filter arrays may be used over the CCDs.

WO 01/99431 A2

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHODS AND APPARATUS FOR INCREASING RESOLUTION IN DIGITAL
IMAGING SYSTEMS BY OFFSETTING PIXELS

This invention was made with Government support awarded by the national science foundation under Grant Number NSF MIP-9613754 and the Army Research Office under Grant Number DOD DAAG 55-97-1-0348. The Government has certain rights in this invention.

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to methods and apparatus for increasing resolution in digital imaging systems by permanently offsetting pixels in overlapped red, green and blue images and reconstructing the full color image.

DESCRIPTION OF THE PRIOR ART

In digital cameras, there are two generally accepted methods for acquiring color images using a light detector array. The first method is to put a color filter array (CFA) over the detector array, such that certain pixels detect certain colors. For example, one third of the pixels would detect red light, one third of the pixels would detect green light, and one third of the pixels would detect blue light. The result of using such a color filter is that each pixel in the array only sees one color, so that to obtain a full color image, interpolation must be used to estimate the other two colors at each pixel. Figures 1A and 1B (prior art) show how this method is used. The image obtained by the detector array through the color filter array has an arrangement of

red pixels, blue pixels, and green pixels, for example in the Bayer CFA pattern, as shown in Figure 1A. The intensity of each pixel indicates how much of the selected color of light was detected. In Figure 1B all of the pixels have all three colors of light, because the green light is interpolated in some manner, for example between pixels G1, G4, G5, and G7 to determine the intensity of green light in the upper left hand pixel, and so on. Thus, each three color pixel is really accurate only with respect to one of the three colors.

The second method is more expensive, and more accurate with respect to color. Three separate detector arrays are used, one for each color. Thus three images, one for each color, are formed. Then the three images are overlapped to give a composite full color image. The grey scale resolution is no better than the first method, but the accuracy of the colors is greater. Figure 2 (prior art) indicates how the three images are overlapped to generate an accurate three color image. In addition, each array has a 100% fill factor (ratio of pixel size to pixel spacing), meaning there is little or no dead space between pixels. This reduces aliasing. Figure 3 (prior art) shows how this occurs. The main lobe of the image spectrum curve is as narrow as possible (the first zero is at the sampling frequency) when the fill factor is 100%.

Aliasing is an important factor in generating color images. Aliasing occurs when the lens presents more spatial detail to the detector array than it can record. The spatial detail that is left over appears as incorrect, less detailed information. That is, the image has errors caused by the detailed information that is masquerading, or aliasing, as

less detailed information.

It is known in the art that the resolution of a detector array can be increased by making multiple exposures of the image and moving the image with respect to the detector array between exposures. For example, if the detector array is shifted by $1/2$ pixel, the image resolution recorded by the combination of the two images is doubled in the direction of the shift. This gives erroneous images if the object moves between exposures. For example, a black on white edge would appear as a colored edge.

A need remains in the art for methods and apparatus for increasing resolution and reducing aliasing in digital imaging systems by permanently offsetting pixels in overlapped red, green and blue images and properly reconstructing the full color image.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide methods and apparatus for increasing resolution in digital imaging systems by permanently offsetting pixels in overlapped red, green and blue images and properly reconstructing the full color image.

This is accomplished by repositioning the fixed detector arrays (or the red, green, and blue images on the detector arrays) so that the resolution of the composite three color image is increased. For example, the green CCD image is shifted horizontally and vertically $1/3$ of a pixel with respect to the red CCD image, and the blue CCD image is further shifted horizontally and vertically $1/3$ of a pixel with respect

to the green CCD image. The detectors themselves need not be moved, but instead the three images can be shifted by the appropriate subpixel amount. The color representation of the resulting image can be as good as the image acquired with the detector arrays aligned, and the resolution can be nearly tripled (the fill factor must be decreased to triple the resolution).

In the general case, n arrays are used. Each array has pixels of height p and width σ , and each one is shifted by p/n vertically and/ or σ/n horizontally.

Another embodiment uses three detector arrays, each with a color filter array on it, and displaces the images by subpixel amounts as described above. One advantage of this approach is that some color filter arrays allot proportionally more pixels to green, because it is more important to human viewers. An example of a color filter array is the Bayer pattern color filter array, shown in Figure 1 (prior art).

The color recovery process, also called reconstruction, is aided by use of one of several interpolation methods. The simplest method entails replicating the color value of each pixel nine times (in a 3 by 3 array) and using the raw red, green, and blue values at each effective pixel location.

A second reconstruction method entails using simple linear interpolation of each color plane. A third reconstruction method interpolates the green color plane by means of linear interpolation, and then interpolates the red and blue color planes with help from the

RECEIVED
CENTRAL FAX CENTER

FEB 28 2007

knowledge of the green color plane.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A (prior art) shows an image obtained by a detector array through the color filter array.

Figure 1B (prior art) shows the reconstructed three color image with one method for interpolating the pixels of the image of Figure 1A.

Figure 2 (prior art) indicates how the three one color images are overlapped to reconstruct a three color image.

Figure 3 (prior art) shows the image spatial frequency spectrum curve obtained using the method of Figure 2.

Figure 4 is a diagram showing red, green, and blue CCD images with offset pixels according to the present invention.

Figure 5 shows the image spectrum curve obtained using the offset pixel method of Figure 4.

Figure 6A is a diagram showing three images obtained by detectors through Bayer color filter arrays with offset pixels. Figure 6B is a diagram showing a similar two detector embodiment.

Figure 7 shows a three by three array of reconstituted pixels obtained by a first reconstruction method according to the present invention.

Figure 8A is a diagram showing a blue array with zero padding and Figure 8B shows a low pass filter for filtering this array illustrating a second reconstruction method according to the present invention.

Figure 9 is a flow diagram illustrating a third reconstruction method according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 4 is a diagram showing red, green, and blue CCD images with offset pixels according to the present invention. These CCD images are shown as arrays having three by three pixels, for simplicity. In practical use, the CCD images would be on the order of 500 by 500 pixels, or larger.

In the example of Figure 4, red CCD image 402 is overlaid by blue CCD image 404, which in turn is overlaid by green CCD image 406. In one preferred embodiment, blue CCD image 404 is offset by $1/3$ of a pixel, both vertically and horizontally, from red CCD image 402. Green CCD image 406 is further offset by $1/3$ of a pixel both vertically and horizontally, in the same direction. This orientation results in an effective sample rate that is three times the normal sampling rate, vertically and horizontally, of the individual CCD arrays. The effective sample rate around the perimeter of the overlaid image is not as high, but in most imaging systems, there are surplus pixels around the perimeter of the array detector.

Each sensor, or CCD, has its own inherent resolution cutoff, which is affected by both the pixel spacing and the pixel size. The digital signal processing combines the three images from the CCDs and forms the effective pixels, reconstructing the image. Figure 7 shows the simplest method of reconstruction in the embodiment of Figure 4.

In the general case, n arrays could be used. Each array has pixels of height p and width σ , and each one is shifted by p/n vertically and/or σ/n horizontally. The detected image in the horizontal dimension, y_h , can then be written as:

$$y_h = [g(x) * \text{rect}(\frac{x}{\sigma})] \sum_{i=0}^{n-1} \text{comb}(\frac{x-i\sigma/n}{\sigma}) \quad (1)$$

Where $g(x)$ is the intensity distribution at the detector, $*$ indicates the convolution operator,

$$\text{rect}(x) = \begin{cases} 1, & |x| \leq \sigma/2 \\ 0, & \text{otherwise} \end{cases} \quad \text{and} \quad \text{comb}(x) = \sum_{k=-4}^4 \delta(x-k)$$

Taking the Fourier transform of (1) the spectrum of the detected image is

$$y_h = \sigma^2 G(u) \text{sinc}(\sigma u) * \text{comb}(\sigma u) \sum_{i=0}^{n-1} \exp(-j2\pi u i \frac{\sigma}{n}) \quad (2)$$

The summation in (2) can be rewritten as,

$$\sum_{i=0}^{n-1} \exp(-j2\pi u i \frac{\sigma}{n}) = \begin{cases} \exp(-j\pi u \frac{(n-1)\sigma}{n}) \sum_{i=-n/2}^{(n/2)-1} \exp(j\pi u \frac{\sigma}{n} (2i+1)), & n \text{ even} \\ \exp(-j\pi u \frac{(n-1)\sigma}{n}) \sum_{i=-(n-1)/2}^{(n-1)/2} \exp(j\pi u \frac{\sigma}{n} 2i), & n \text{ odd} \end{cases} \quad (3)$$

Using the Euler relation the summations in (3) can be written as

cosines as:

$$\sum_{i=0}^{n-1} \exp(-j2\pi i \frac{\sigma}{n}) = \begin{cases} \exp(-j\pi u \frac{(n-1)\sigma}{n}) \sum_{i=0}^{n/4} 3 \cdot 2 \cos(2\pi u \frac{\sigma}{n} (i + \frac{1}{2})), & n \text{ even} \\ \exp(-j\pi u \frac{(n-1)\sigma}{n}) \left[\sum_{i=0}^{(n-1)/2} 3 \cdot 2 \cos(2\pi u \frac{\sigma}{n} i) \right], & n \text{ odd} \end{cases} \quad (4)$$

Two cases of particular interest are when $n=2$ and $n=3$. Ignoring the phase term, which is not detected by a CCD, the image spectra of these two cases are:

$$y_h|_{n=2} = \sigma^2 G(u) \text{sinc}(\sigma u) * 2 \cos(2\pi u \frac{\sigma}{4}) \text{comb}(\sigma u) \quad (5a)$$

$$y_h|_{n=3} = \sigma^2 G(u) \text{sinc}(\sigma u) * (1 + 2 \cos(2\pi u \frac{\sigma}{3})) \text{comb}(\sigma u) \quad (5b)$$

Figure 5 shows the image spectrum curve obtained using the offset pixel method of Figure 4.

Curve 506 is the closest replicated spectrum (caused by the sampling) that remains after sampling with a $1/2$ pixel shift. For example, the blue image may be moved down $1/2$ pixel and the green image may be moved to the side $1/2$ pixel.

Curve 508 is the closest replicated spectrum that remains after sampling with a $1/3$ pixel shift, and shows that again there is no aliasing. In this case the blue image might be moved down $1/3$ pixel and to the right $1/3$ pixel, and the green image might be moved down $2/3$ pixel and to the right $2/3$ pixel. Curve 510 is a sinc function related

to the width of the pixel, and provides low pass filtering of the image. To increase the resolution in the case of a $1/3$ pixel shift, the pixel size (and hence the fill factor) must be reduced. This broadens the sinc function and thereby passes higher frequencies. Any replicated spectrum that overlapped the image spectrum would result in aliasing of the image. Comparison with the image spectrum of Figure 3 (prior art) shows how the resolution has increased, and aliasing has been greatly reduced or eliminated.

Figure 6A is a diagram showing three images obtained by detectors through Bayer color filter arrays with offset pixels. Bayer color filter arrays (CFAs) use twice as many green pixels as red or blue pixels, because green is the most important color to human viewers. The three images (for example) are overlaid in an offset manner as described above. There are a multitude of variations on this idea not only in reconstruction methods but also in the CCD CFAs used. These CFAs take on many different forms and are usually designed to facilitate reconstruction through knowledge of the human visual system. The idea of using shifted CCD arrays to increase resolution, antialiasing and color performance can be extended to use any combination of CFAs. Another such example might be the use of one green CCD and two Bayer CFAs.

Figure 6B shows an alternative embodiment, wherein one detector array could be used to detect the green portion of images, and a second array with red and blue filters could be displaced $1/2$ pixel both in the x and y directions. This doubles the resolution of the system,

reduces aliasing, provides more green information for the color interpolation (or image reconstruction), and reduces the number of CCD arrays needed.

Given the $1/3$ pixel shifting described with regard to Figure 6A, a generalized pixel results in nine effective pixels, as shown in Figure 4. Figure 7 shows a three by three array of reconstituted effective pixels obtained by the simplest reconstruction method (for example section 408 of Figure 4, coterminous with blue pixel 22). This method of reconstruction entails replicating the value of each color pixel nine times (in a three by three array), and applying the raw red, green, and blue values at each location.

The present method does not attempt to increase the resolution of each channel, but rather that of the final three-color image. In order to prevent unwanted color effects in the final image, some form of reconstruction is desirable. Figures 8a and 8b illustrate linear interpolation of each channel, or color plane.

Figure 8A is a diagram showing a blue array with zero padding. Each channel or color plane is increased to nine times its original size (e.g. A 100 by 100 pixel array would be transformed into a 300 by 300 value array) by inserting eight zeroes around each pixel value. A simple low pass filter is then applied to each channel in order to replace the inserted zeroes with their estimated values as shown in Figure 8B.

Figure 8B shows a five by five low pass filter for filtering the array of Figure 8A (the filter can also be larger). The coefficients used in the filter are denoted u , w , x , y , z and can be optimized for best

performance by those skilled in the art of filter design. The only restriction on the coefficients of the filter shown in Figure 8B are that $x+z=1$ and $2w+y+u=1$. This reconstruction method produces a better image than the method shown in Figure 7, but it ignores the fact that the human eye responds better to green light than to red or blue. Also, it blindly interpolates each channel separately.

Figure 9 is a flow diagram illustrating a third reconstruction method, which interpolates the green channel first, and then uses the results to better interpolate the red and blue channels. This method avoids the blind interpolation of the previous method and also utilizes a major aspect of the human visual system. In the case of the blue channel, the above objective is achieved as illustrated in Figure 9. Again, eight zeros are placed around the known blue values to create a zero-padded version of the blue channel as shown in Figure 8A. The zero-padded blue channel and the interpolated green channel are divided on a pixel by pixel basis. This yields a new channel that has ratios of blue and green at pixel locations where blue was known and zeros elsewhere. It is this new channel that is then lowpass filtered, recalling the same nuances described in the method above, to replace the zero values. Finally, a pixel by pixel multiplication with the resulting channel and the interpolated green channel produces the final interpolated blue channel. An identical process is used to interpolate the red channel. The three interpolated channels now compose a reconstructed image with increased resolution, antialiasing and color performance.

Those skilled in the art will appreciate that many other configurations

WO 01/99431

fall within the spirit and scope of the present invention.

What is claimed is:

CLAIMS

1. Improved apparatus for increasing resolution in a digital imaging system of the type having at least two fixed detector arrays for imaging an object and reconstruction means for composing a composite image from the images captured by the detector arrays, wherein the improvement comprises:

each detector array is located such that its captured image is shifted by a subpixel amount with respect to the images captured by the other detector arrays; and

the reconstruction means provides color for each portion of the shifted images.

2. The apparatus of claim 1, having two fixed detector arrays, one configured for capturing a red and blue image, and the other for capturing a green image, wherein the images captured by the detector arrays are shifted $1/2$ of a pixel with respect to each other captured image.

3. The apparatus of claim 1 having three fixed detector arrays.

4. The apparatus of claim 3, wherein the three detector arrays are configured for capturing a red, a green, and a blue image, and wherein the images captured by the detector arrays are shifted $1/3$ of a pixel with respect to each other captured image.

5. The apparatus of claim 3, wherein the three detector arrays are configured for capturing Bayer pattern images, and wherein the images

captured by the detector arrays are shifted $1/3$ of a pixel with respect to each other captured image.

6. A method of imaging an object comprising the steps of:

(a) capturing three images of the object;

(b) shifting each captured image a subpixel amount with respect to the other captured images; and

(c) interpolating between the shifted images to form a composite image.

7. A method of imaging an object comprising the steps of:

(a) capturing two images of the object;

(b) shifting each captured image a subpixel amount with respect to the other captured image; and

(c) interpolating between the shifted images to form a composite image.

R1	G1	R2	G2	R3	G3
G4	B1	G5	B2	G6	B3
R4	G7	R5	G8	R6	G9
G10	B4	G11	B5	G12	B6
R7	G13	R8	G14	R9	G15
G16	B7	G17	B8	G18	B9

Figure 1A (Prior Art)

R1245	R25	R2356
B1	B12	B2
G1457	G5	G56

Figure 1B (Prior Art)


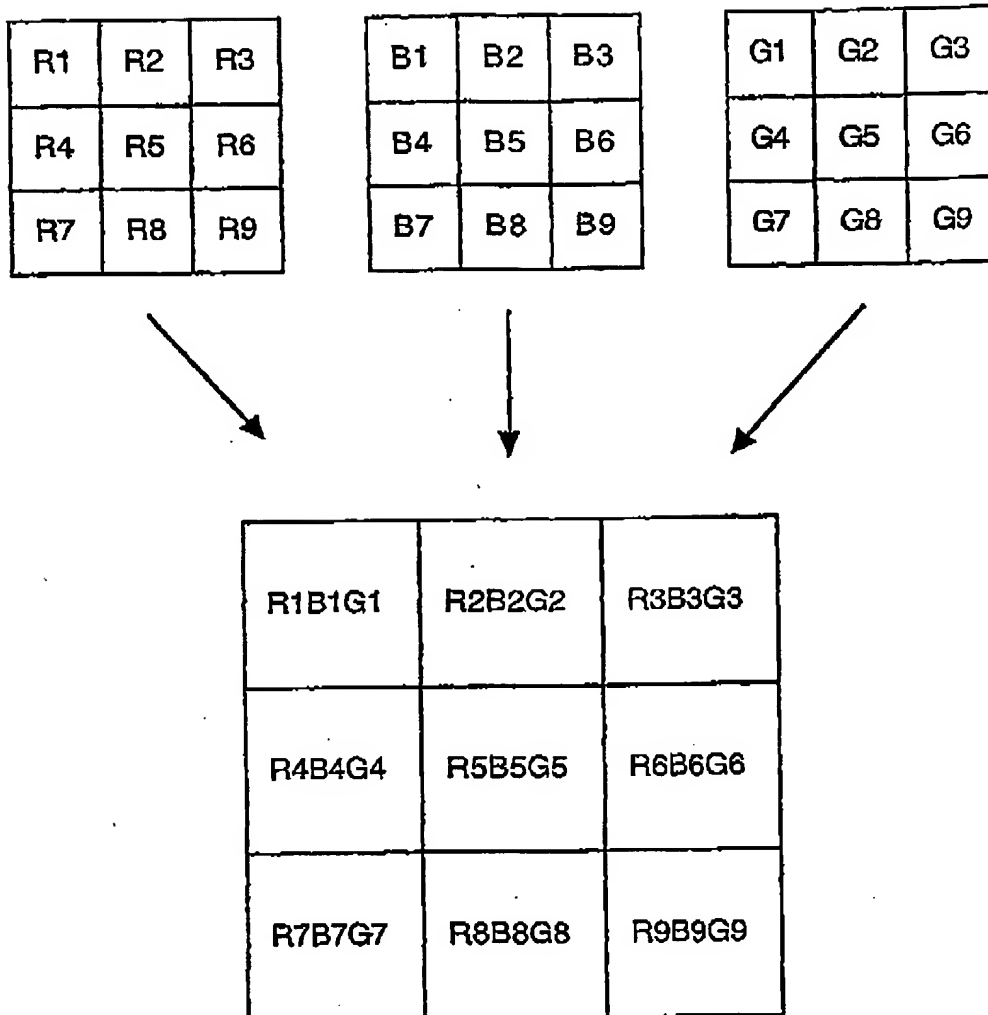



Figure 2 (Prior Art)

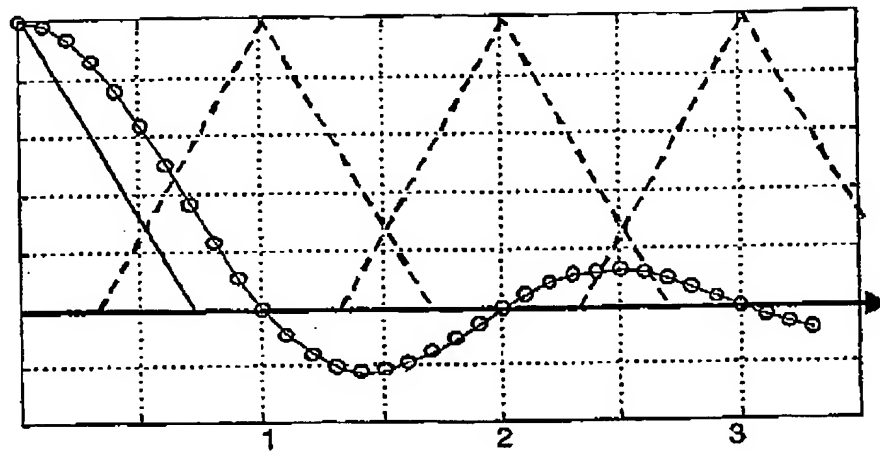

Normalized Sampling Frequency

Figure 3 (Prior Art)

Figure 4

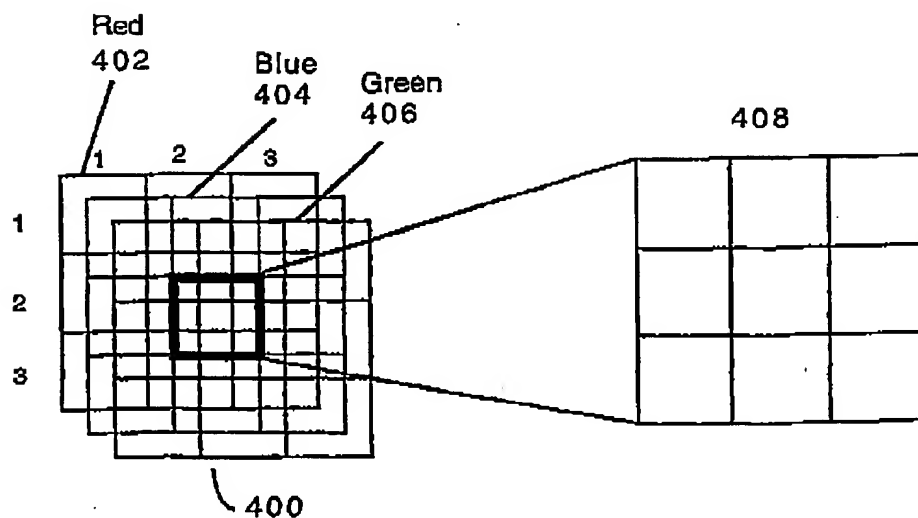

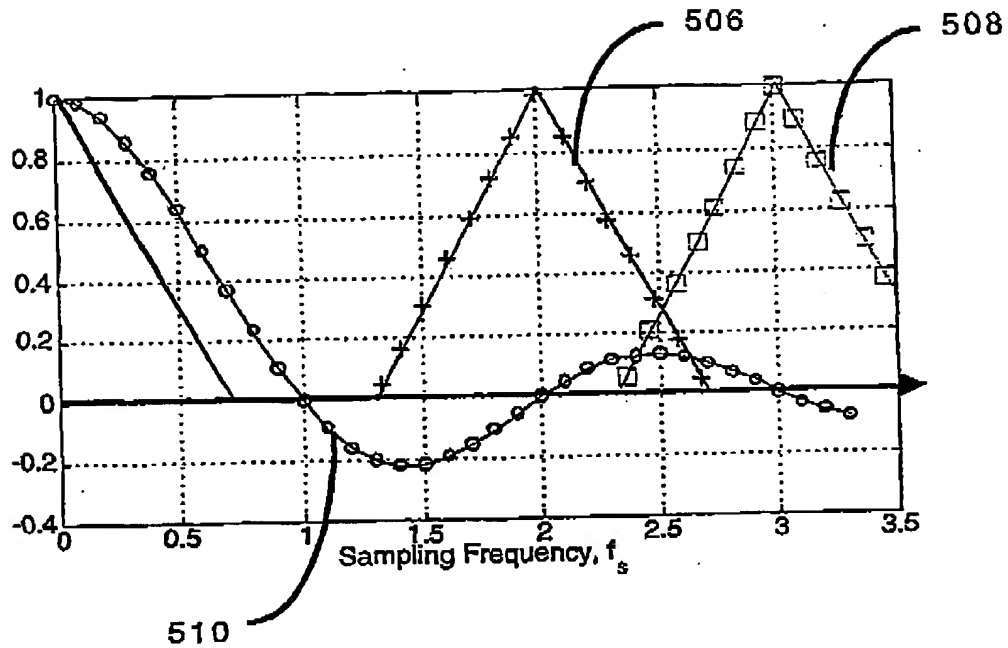


Figure 5

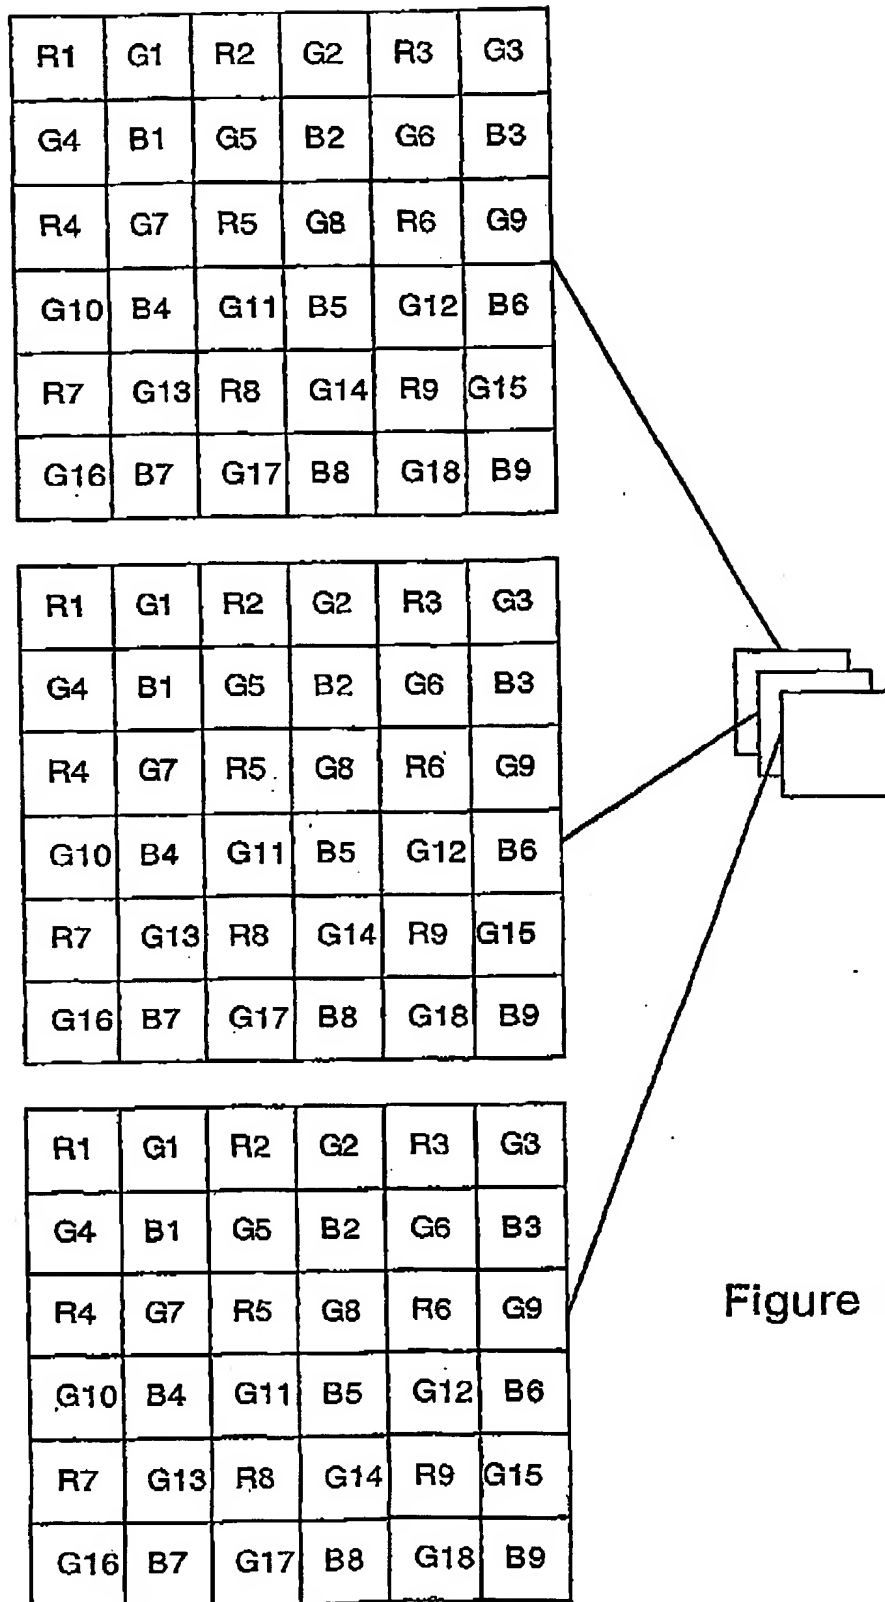


Figure 6A

Figure 6B

R1	B1	R2	B2	R3	B3
B4	R4	B5	R5	B6	R6
R7	B7	R8	B8	R9	B9
B10	R10	B11	R11	B12	R12
R13	B13	R14	B14	R15	B15
B16	R16	B17	R17	B18	R18

G1	G2	G3	G4	G5	G6
G7	G8	G9	G10	G11	G12
G13	G14	G15	G16	G17	G18
G19	G20	G21	G22	G23	G24
G25	G26	G27	G28	G29	G30
G31	G32	G33	G34	G35	G36



$R_{22}B_{22}G_{11}$	$R_{22}B_{22}G_{12}$	$R_{23}B_{22}G_{12}$
$R_{22}B_{22}G_{21}$	$R_{22}B_{22}G_{22}$	$R_{23}B_{22}G_{22}$
$R_{32}B_{22}G_{21}$	$R_{32}B_{22}G_{22}$	$R_{33}B_{22}G_{22}$

408'

Figure 7

0	0	0	0	0	0
0	B_0	0	0	B_1	0
0	0	0	0	0	0
0	0	0	0	0	0
0	B_2	0	0	B_3	0
0	0	0	0	0	0

(a)

u	w	z	w	u
w	y	x	y	w
z	x	l	x	z
w	y	x	y	w
u	w	z	w	u

(b)

Figure 8

WO 01/99431

8/8

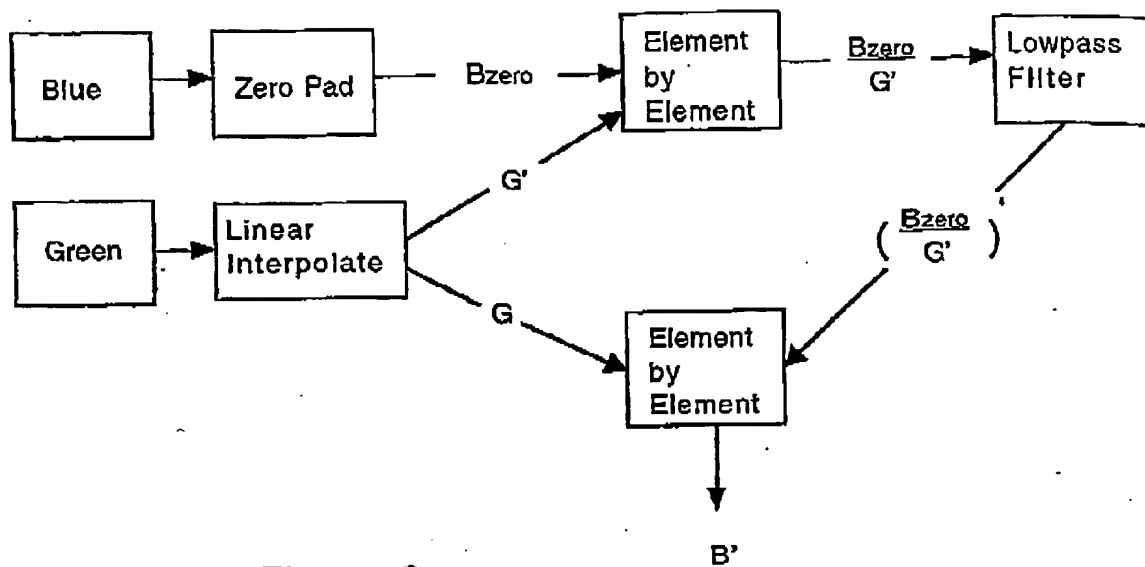


Figure 9

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/99431 A3(51) International Patent Classification⁷: H04N 9/04, 3/15

(21) International Application Number: PCT/US01/18954

(22) International Filing Date: 13 June 2001 (13.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/596,153 16 June 2000 (16.06.2000) US

(71) Applicant: UNIVERSITY TECHNOLOGY CORPORATION [—/US]; Suite 230, 4001 Discovery Drive, Campus Box 588, Boulder, CO 80303-7816 (US).

(72) Inventors: CATHEY, Wade, Thomas, Jr.; 228 Alpine Way, Boulder, CO 80304 (US). WACH, Hans, Brandon; 1130 6th Avenue, Longmont, CO 80501 (US).

(74) Agents: BALES, Jennifer, L. et al.; Macheledt Bales & Johnson LLP, Mountain View Plaza, 1520 Euclid Circle, Lafayette, CO 80026-1250 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
28 March 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR INCREASING RESOLUTION IN DIGITAL IMAGING SYSTEM BY OFFSETTING PIXELS

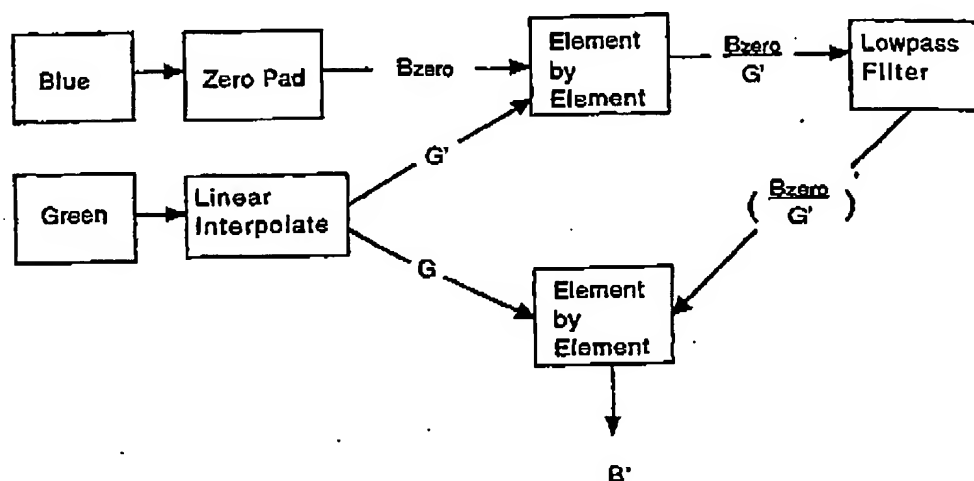

(57) Abstract: Methods and apparatus for increasing resolution in digital imaging systems reposition the fixed detector arrays (or the red, green, and blue images on the detector arrays) so that the resolution of the composite three color image is increased. For example, the green CCD image is shifted horizontally and vertically 1/3 of a pixel with respect to the red CCD image, and the blue CCD image is further shifted horizontally and vertically 1/3 of a pixel with respect to the green CCD image. Image alignment may be accomplished with some combination of CCD movement and/or image movement. The color recovery process, also called reconstruction, may be aided by use of one of several interpolation methods. Color filter arrays may be used over the CCDs.

WO 01/99431 A3

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 01/18954		
A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04N9/04 H04N3/15		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 275 (E-1553), 25 May 1994 (1994-05-25) & JP 06 046433 A (MATSUSHITA ELECTRIC IND CO LTD), 18 February 1994 (1994-02-18) abstract	1-3,6,7
X	US 5 640 206 A (KITAMURA HIROYUKI ET AL) 17 June 1997 (1997-06-17) column 20, line 10 - line 30	1,3,6,7
X	US 5 532 742 A (SAKAGUCHI TAKASHI ET AL) 2 July 1996 (1996-07-02) figures 2A, 2B, 5, 7, 10	1-3,6,7
X	US 5 442 394 A (LEE HYD S) 15 August 1995 (1995-08-15) figures 2B, 4A	1,3-5
-/-		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of this report.		<input checked="" type="checkbox"/> Patent family members are listed in annex.
* Special categories of cited documents:		
A document defining the general state of the art which is considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) which is cited to establish the publication date and/or the citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *G* document member of the same patent family		
Date of the actual completion of the international search 20 December 2001		Date of mailing of the international search report 03/01/2002
Name and mailing address of the ISA European Patent Office, P.O. Box 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer De Paepe, W

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Int. l. Application No
PCT/US 01/18954

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 725 881 A (BUCHWALD WOLF-PETER) 16 February 1988 (1988-02-16) figure 1	1,3-5
A	EP 0 888 001 A (CANON KK) 30 December 1998 (1998-12-30)	

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 01/18954

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 06046433	A	18-02-1994	JP 3024370 B2	21-03-2000
			DE 69327895 D1	30-03-2000
			DE 69327895 T2	12-10-2000
			EP 0605738 A1	13-07-1994
			WO 9403015 A1	03-02-1994
			US 5532742 A	02-07-1996
			US 5602588 A	11-02-1997
			US 5798792 A	25-08-1998
US 5640206	A	17-06-1997	JP 7327233 A	12-12-1995
			JP 3024492 B2	21-03-2000
			JP 8098190 A	12-04-1996
			US 5726709 A	10-03-1998
US 5532742	A	02-07-1996	JP 3024370 B2	21-03-2000
			JP 6046433 A	18-02-1994
			JP 3134513 B2	13-02-2001
			JP 6046434 A	18-02-1994
			JP 3134514 B2	13-02-2001
			JP 6046429 A	18-02-1994
			JP 3134515 B2	13-02-2001
			JP 6046430 A	18-02-1994
			JP 3064721 B2	12-07-2000
			JP 6233316 A	19-08-1994
			DE 69327895 D1	30-03-2000
			DE 69327895 T2	12-10-2000
			EP 0605738 A1	13-07-1994
			WO 9403015 A1	03-02-1994
			US 5602588 A	11-02-1997
			US 5798792 A	25-08-1998
US 5442394	A	15-08-1995	KR 9404433 B1	25-05-1994
			FR 2673792 A1	11-09-1992
			JP 2625603 B2	02-07-1997
			JP 5091519 A	09-04-1993
			NL 9200343 A ,B,	16-09-1992
US 4725881	A	16-02-1988	DE 3418787 A1	21-11-1985
			WO 8505526 A1	05-12-1985
			JP 5075235 B	20-10-1993
			JP 61502229 T	02-10-1986
			NL 8520112 T	01-04-1986
EP 0888001	A	30-12-1998	JP 11018097 A	22-01-1999
			EP 0888001 A2	30-12-1998

Form PCTISA/210 (patent family annex) (July 1992)